


## HD indoor led display (HD169)



### Features:

- High resolution high precision;
- Cabinet size:600mm x 337.5mm;
- Ratio: 16:9;
- Seamless splicing,High gray scale, good performance;
- Fanless design;
- Large view angle;
- The most effective solution for indoor HD billboard;
- Hd display, the picture is exquisite;
- With small volume, light weight,about 5.6kg/pcs.

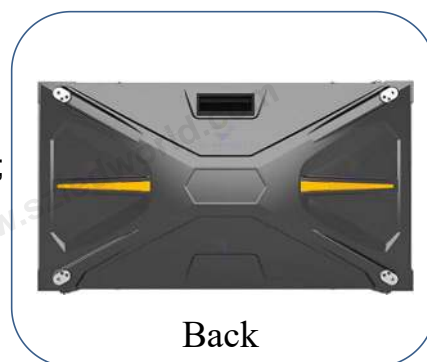

## Application:

Stage Performance    
  Conference    
  Celebration    
  banquet    
  exhibition

## Technical Specifications:

Pixel Pitch	P1.25	P1.56	P1.875
LED type	SMD1010	SMD1010	SMD1515
Pixel configuration	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD
Pixel density	640,000 pixels/m <sup>2</sup>	409,600 pixels/m <sup>2</sup>	284,444 pixels/m <sup>2</sup>
Module dimension(W*H)	150*168.75mm	150*168.75mm	150*168.75mm
Module resolution	120*135dots	96*108dots	80*90dots
Drive Method	1/30 scan	1/32 scan	1/30 scan
Maintenance	Front	Front	Front
Cabinet size (W*H)	600*337.5mm	600*337.5mm	600*337.5mm
Cabinet resolution	480*270dots	384*216dots	320*180dots
Cabinet depth	60mm	60mm	60mm
Cabinet material	Die-casting aluminum	Die-casting aluminum	Die-casting aluminum
Cabinet net weight	about 5.6kg/pcs	about 5.6kg/pcs	about 5.6kg/pcs
Brightness	800 ~ 1000cd/m <sup>2</sup>	800 ~ 1000cd/m <sup>2</sup>	800 ~ 1000cd/m <sup>2</sup>
Viewing Distance	1.25m	1.56m	1.8m
Viewing Angle	140 * 140	140 * 140	140 * 140
Grey scale Level	16384	16384	16384
Colors	687 million	687 million	687 million
Color temperature	4,500~8,500 adjustable Deg.K	4,500~8,500 adjustable Deg.K	4,500~8,500 adjustable Deg.K
Contrast Ratio	4000:1	4000:1	4000:1
Digital Processing	14 bit/16bit	14 bit/16bit	14 bit/16bit
Refresh Rate	3840Hz / 1920HZ	3840Hz / 1920HZ	3840Hz / 1920HZ
Power consumption(Avg.)	200w	200w	200w
Power consumption(Max.)	800w	800w	800w
Humidity-operating	10% ~ 85%	10% ~ 85%	10% ~ 85%
Operating Temperature	-20° - +60° C	-20° - +60° C	-20° - +60° C
Screen life	≥100000 hours	≥100000 hours	≥100000 hours
Controlling System	Synchronouse	Synchronouse	Synchronouse
Certificates	CE,RoHs,FCC,UL	CE,RoHs,FCC,UL	CE,RoHs,FCC,UL
Ingress Protection (IP)	IP31	IP31	IP31
Warranty	2 Years	2 Years	2 Years

Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to SZLEDWORLD.