



## Transparent flexible led display (LTF series)

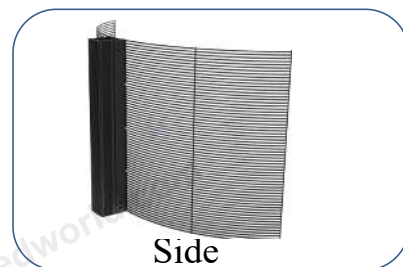

### Cabinet:

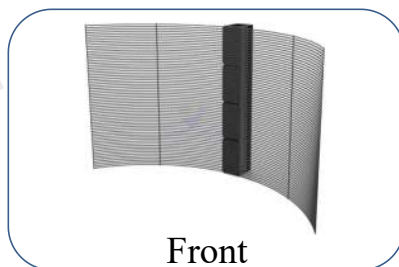

### Features:

- Very light, 13kg/sqm;
- Suitable for curve shape transparent led display;
- Ultra-Transparent, 78% ;
- High brightness;
- The cabinet can be customized;
- High refresh rate;



## Application:

Shopping malls     
  Airports     
  Exhibitions     
  Stores     
  4S shops

## Technical Specifications:

Pixel Pitch	P3.91-7.81mm	P5.2-7.81mm	P7.81-7.81mm
LED type	SMD 1921	SMD 1921	SMD 1921
Pixel configuration	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD
Pixel density	32,747 pixels/m <sup>2</sup>	24,585 pixels/m <sup>2</sup>	16,394 pixels/m <sup>2</sup>
Module resolution	Custom	Custom	Custom
Ingress Protection	IP20	IP20	IP20
Cabinet material	Aluminum profile or die casting	Aluminum profile or die casting	Aluminum profile or die casting
Cabinet size	Custom	Custom	Custom
LED display weight	13kg/m <sup>2</sup>	13kg/m <sup>2</sup>	13kg/m <sup>2</sup>
Brightness	6000nits	6000nits	6000nits
Transparency	78%	78%	78%
Viewing Angle	Custom	Custom	Custom
Grey Level	14 Bit	14 Bit	14 Bit
Refresh Rate	1920Hz	1920Hz	1920Hz
Viewing distance	≥3m	≥5m	≥8m
Drive model	1/8scan	1/7scan	1/7scan
Power consumption(Avg.)	240w/sqm	240w/sqm	240w/sqm
Power consumption(Max.)	800w/sqm	800w/sqm	800w/sqm
Operating Temperature	-20° - 50° C	-20° - 50° C	-20° - 50° C
Screen life	≥100000 hours	≥100000 hours	≥100000 hours
Controlling System	Synch or Async	Synch or Async	Synch or Async
Warranty	2 Years	2 Years	2 Years

Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to SZLEDWORLD.